



# WD12C350-18 Marine propulsion engine



## Basic engine specifications

Rating .....	P1
Rated power-kW .....	258
Rated speed-rpm .....	1800
Overload power-kW .....	284
Overload speed-rpm .....	1858
Rated power tolerance-% .....	±3
Low idle speed -rpm .....	650
High idle speed-rpm .....	1980
N° of Cylinders / Valves .....	6/12
Cylinders arrangement .....	In-line
Thermodynamic cycle .....	4 stroke
Bore × Stroke-mm(in) .....	126×155 (4.96×6.10)
Compression ratio .....	17:1
Displacement-L(in <sup>3</sup> ) .....	11.596 (707.6)
Fuel system .....	Mechanical
Injection system .....	Direct injection
Aspiration .....	Turbocharged and aftercooled
Flywheel housing/Flywheel/N° of teeth on flywheel ring gear(standard) .....	SAE 1/14°/136
Flywheel housing/Flywheel/N° of teeth on flywheel ring gear(optional) .....	/
Firing order .....	1-5-3-6-2-4
Rotation(from flywheel end) .....	Counterclockwise
Overall dimensions(L×W×H)-mm(in) .....	1478×808×1344 (58.2×31.8×52.9)
Dry weight-kg(lb) .....	1110 (2447)
Wet weight-kg(lb) .....	1208 (2663)
Max. output power of front end-kW(Ps) .....	19.04 (25.9)
Emission compliance .....	IMO Tier II
Lifting cylinder height- m(ft) .....	1 (3.28)

## Rating definitions

### Continuous Duty (P1)

The engine can run at full load continuously. The average load factor is 70% to 100%. Annual working time is recommended but not limited to 5000h~8000h.

### Heavy Duty (P2)

The engine can run at full load for 8h every 12h. The average load factor is 40% to 80%. Annual working time is recommended but not limited to 5000h.

### Intermittent Duty (P3)

The engine can run at full load for 4h every 12h. The average load factor is 40% to 80%. Annual working time is recommended but not limited to 3000h.


### Light Duty (P4)

The engine can run at full load for 2h every 8h. The average load factor is about 60%. Annual working time is recommended but not limited to 1000h.


### High Performance Duty (P5)

The engine can run at full load for 0.5h every 5h. The average load factor is about 60%. Annual working time is recommended but not limited to 500h.


## Power

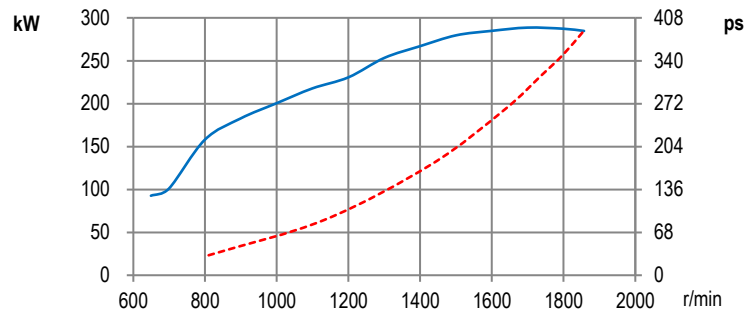


## Torque

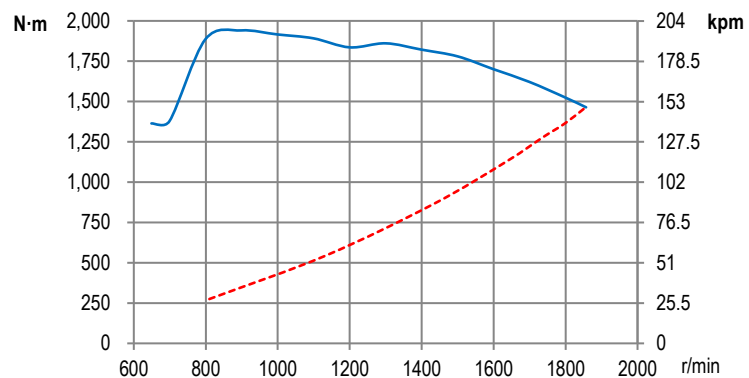

## Fuel consumption

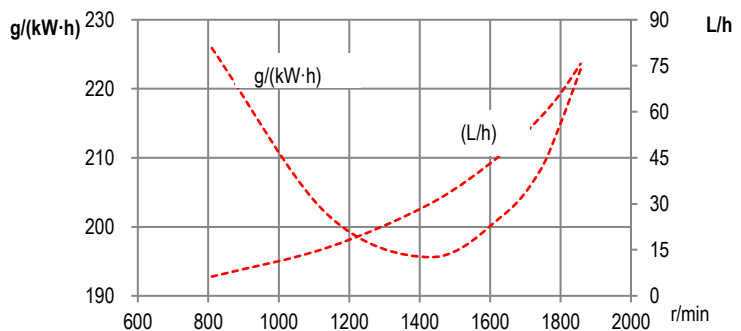

— Full load speed characteristics  
 - - - Propeller characteristics

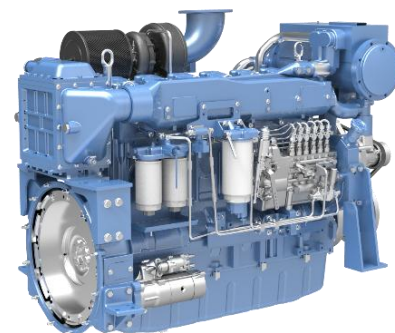



## Air intake system

Intake air flow-m <sup>3</sup> /min(cfm)	22.3 (797.8)
Max. allowable intake air restriction- kPa(in H <sub>2</sub> O)	7 (28.1)
Intake air temperature up to-°C(°F)	50±5 (122±41)
Heat rejection to atmosphere-kW(BTU/min)	34.4(1956.3)

## Cooling system

Coolant capacity of the engine-L(gal)	73(16.06)
Max. sea water strainer mesh hole diameter- mm(in)	2 (0.08)
Sea water pump flow-m <sup>3</sup> /h(gal/h)	18 (3960)
Head of sea water pump -m(ft)	17(55.7736)
Max. self-priming height of sea water pump- m(ft)	2(6.5616)
Expansion tank pressure cap- kPa(psi)	50(7.3)
Heat dissipating to heat exchanger- kW(BTU/min)	131.8(7495.3)
Coolant flow-m <sup>3</sup> /h(gal/h)	24(5279)
Temperature range of engine outlet -°C(°F)	72~95(161.6~203)
Temperature range of thermostat-°C(°F)	71~82(159.8~179.6)

## Exhaust system

Exhaust flow-m <sup>3</sup> /min(cfm)	61.8 (2207.51)
Max. exhaust back pressure-kPa(in H <sub>2</sub> O)	6 (24.10)
Max. exhaust temperature before turbocharger-°C(°F)	/ (/)
Max. exhaust temperature after turbocharger-°C(°F)	550(1022)
Max. bending moment of turbocharger flange- N·m(ft·lbs)	19(14.0)
Exhaust smoke-FSN	≤1.5

## Lubricating system

Max. install angle(fore-aft)	10°
Max. install angle(athwart ship)	15°
Max. operating angle(fore-aft)	30°
Max. operating angle(athwart ship)	30°
Sump type	Wet
Oil capacity Low/High-L(gal)	22.2/27.2 (4.88/5.98)
Oil consumption -g/(kW·h)	≤0.3
Oil flow- L/min(gal/min)	/ (/)
Oil pressure of idle speed- kPa(in H <sub>2</sub> O)	130~280(522~1124)
Oil pressure of rated speed- kPa(in H <sub>2</sub> O)	380~550(1525.98~2208.66)

## Fuel system

Fuel flow supply line- L/h(gal/h)	71.4 (15.7)
Fuel flow return line- L/h(gal/h)	/ (/)
Max. Allowable fuel supply restriction -kPa(in H <sub>2</sub> O)	18 (72.3)
Fuel supply restriction on engine-kPa(in H <sub>2</sub> O)	10 (40.2)
Allowable fuel restriction of shipyard supplied components-kPa(in H <sub>2</sub> O)	8 (32.1)
Max. fuel return restriction-kPa(in H <sub>2</sub> O)	22 (88.4)
Max. self-priming height of fuel delivery pump-m(ft)	1 (3.28)
Max. fuel inlet temperature-°C(°F)	50 (122)
Max. fuel inlet pressure- kPa(in H <sub>2</sub> O)	0(0)

## Starting system

Electrical system voltage(2-pole)-V	24
Electric starter power-kW(Ps)	7.5 (10.2)
Recommended battery capacity- A·h	165×2
Alternator working current-A	35

## Security parameters

Alarm speed-rpm	2070
Shut down speed-rpm	2160
Alarm oil pressure-MPa	0.12
Shut down oil pressure-MPa	0.08
Alarm oil temperature-°C(°F)	105(221)
Alarm coolant temperature-°C(°F)	97(206.6)

## Noise

Noise(SPL)- dB(A)	110.9
-------------------	-------

## General remarks

- The origin of coordinates is at the center of the flywheel housing back end surface. X axis directs from flywheel to front, Z axis directs vertical up, Y axis direction is defined by right-hand rule.
- All ratings are based on operating conditions under ISO 8665, ISO 3046-1.
- Curves represent net engine performance in accordance with ISO 3046/1 with standard accessories such as fuel injection pump, water pump and L.O. pump under the condition of 25°C/77°F ambient temperature, 100kPa[29.612 in Hg] barometric pressure, 30% relative humidity and 25°C/77°F raw water temperature at inlet.

@2021 Weichai

All rights reserved.

Materials and specifications are subject to change without notice.